# DIRECT-OPERATED SOLENOID VALVES

## Solenoid Valve Type 65

65.171

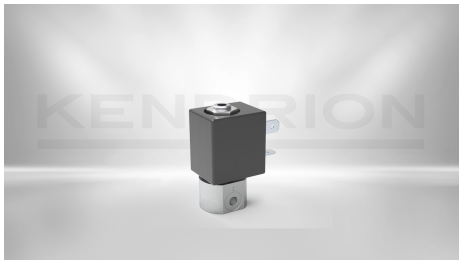

These valves can be supplied in a wide variety of standard versions, e.g.: in three different base shapes (standard, flange and screw-in base), with connection for plug-in socket prefabricated or with flying leads, as 3/2 way NO/NC valve (2/2 way on request), also available as low watt version and with nominal orifice of 0.5, 1, 1.6 or 2 mm. For plug-in sockets, current indication and erasing diode please see valve accessories

| DESCRIPTION | VALUE |
|---|---|
| **Function** | 3/2-way NC |
| **Pressure range** | 0 - 5 bar |
| **Nominal orifice** | 1.6 mm |
| **Type of pneumatic connection** | M5 |
| **Kv-value** | 0.9 l/min |
| **Size** | 20 mm |
| **Actuation type** | electrically actuated |
| **Duty cycle** | 100 % ED |
| **Type of electric connection** | Plug-in socket |
| **Medium** | Filtered (5 µm), lubricated and non lubricated air |
| **Nominal power** | 4.5 W |
| **Nominal voltage** | 24 V DC |
| **Returning mechanism** | Spring |
| **Protection class** | IP65 |
| **Ambient temperature** | -10 ... +60 °C |
| **Valve type** | Poppet valve |
| **Materials** | Base: Brass, seal: NBR |



*© Kendrion N.V.*

| | |
|---|---|
| **Actuation** | directly controlled |
| **Identification number** | 12163 |

## CONTACT

Sales Team Kendrion IAC

+49 (0) 4523 402-0

sales@kendrion.com

## PRODUCT

https://www.kendrion.com/en/productfinder/group/product/direct-operated-solenoid-valves/65171


*© Kendrion N.V.*