

## LINEAR SOLENOIDS


### Frame Linear Solenoid LCL 70x80

43070003

The D-frame solenoid LCL is characterized by a compact design, low power consumption and short switching times. A long service life is promoted by the precision steel tube housing and maintenance-free armature bearings. The frame solenoid can be installed in any position, with the force preferably being applied in the axial direction only. It is fastened via threaded holes on the side or on the face.

As standard, the frame linear solenoid has a chemically nickel-plated armature and a plastic-molded solenoid coil and has protection class IP 40. Versions with bellows achieve protection class IP54.

Other voltages are possible on request.

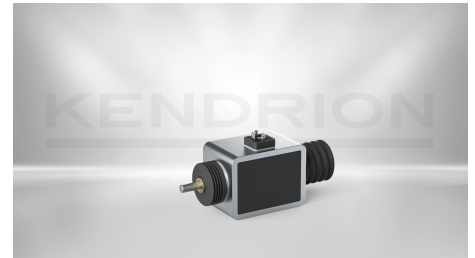

DESCRIPTION	VALUE
Duty cycle	100 %
Power consumption	37.4 W
Stroke	30 mm
Initial force	40 N
Nominal voltage	24 V
End force	125 N
Return spring	No
Dimensions (length, width, height)	119 x 70 x 80 mm
Length	119
Width	70
Height	80
Design	No
Protection class	IP 54/65

<b>Thermal class</b>	B 130
<b>Connection</b>	Plug
<b>Solenoid weight</b>	3250 g
<b>Armature weight</b>	630 g
<b>Product Line</b>	Single Stroke Linear Solenoids

## CONTACT

Sales Team Kendrion Malente

+49 (0) 4523 402-0

[sales-ics@kendrion.com](mailto:sales-ics@kendrion.com)

## PRODUCT

<https://www.kendrion.com/en/productfinder/group/product/linear-solenoids/43070003>