


LINEAR SOLENOIDS

Linear Solenoid H1686

H1686-R-F-24V DC 100 ED

Open frame linear solenoid as **Push and Pull type solenoid** with integrated return spring. Our preferred types are available in small quantities from stock. Other versions or other voltages are available on request. More information can be found in the download area.

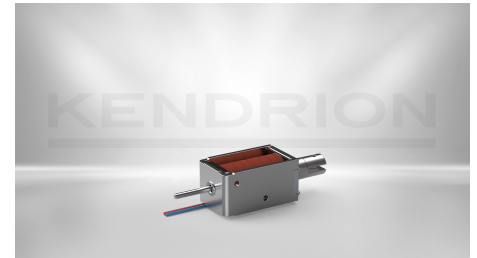

DESCRIPTION	VALUE
Duty cycle	100 %
Power consumption	3.6 W
Stroke	4 mm
Initial force	0.5 N
Nominal voltage	24 V
End force	1 N
Return spring	Yes
Dimensions (length, width, height)	19 x 16 x 31 mm
Length	19
Width	16
Height	31
Design	No
Protection class	IP 00
Thermal class	F, 155
Connection	10 cm lead
Solenoid weight	48 g
Armature weight	14 g
Product Line	Single Stroke Linear Solenoids

CONTACT

Sales Team Kendrion Malente

+49 (0) 4523 402-0

sales-ics@kendrion.com

PRODUCT

<https://www.kendrion.com/en/productfinder/group/product/linear-solenoids/h1686-r-f-24v-dc-100-ed>