


## LINEAR SOLENOIDS

### Linear Solenoid H2206

H2206-F-24V DC 100 ED

Open frame linear solenoid as **Pull type solenoid** with conical face armature. Our preferred types are available in small quantities from stock. Other versions or other voltages are available on request. More information can be found in the download area.

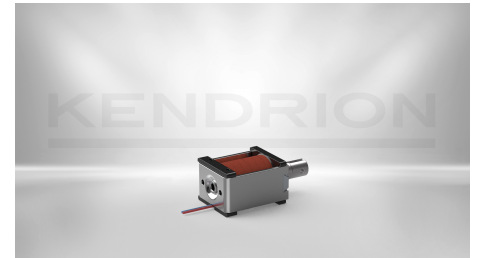

DESCRIPTION	VALUE
Duty cycle	100 %
Power consumption	5.2 W
Stroke	5 mm
Initial force	0.6 N
Nominal voltage	24 V
End force	3.5 N
Return spring	No
Dimensions (length, width, height)	25 x 20 x 32 mm
Length	25
Width	20
Height	32
Design	No
Protection class	IP 00
Thermal class	B, 130
Connection	10 cm lead
Solenoid weight	65 g
Armature weight	13 g
Product Line	Single Stroke Linear Solenoids

## **CONTACT**

Sales Team Kendrion Malente

+49 (0) 4523 402-0

[sales-ics@kendrion.com](mailto:sales-ics@kendrion.com)

## **PRODUCT**

<https://www.kendrion.com/en/productfinder/group/product/linear-solenoids/h2206-f-24v-dc-100-ed>