


LINEAR SOLENOIDS

Linear Solenoid H2486

H2486-R-F-24V DC 100 ED

Linear solenoid in open design, optionally as a **pull, push or combination solenoid** with integrated return spring. Our preferred types are available in small quantities from stock. Other versions or other voltages are available on request. More information can be found in the download area.

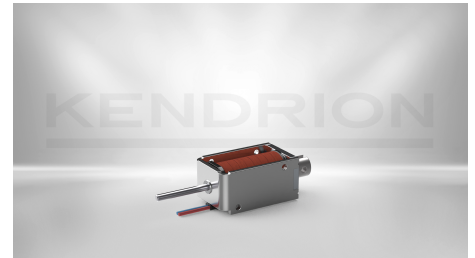

DESCRIPTION	VALUE
Duty cycle	100 %
Power consumption	6 W
Stroke	8 mm
Initial force	0.4 N
Nominal voltage	24 V
End force	3.5 N
Return spring	Yes
Dimensions (length, width, height)	25 x 20.5 x 40 mm
Length	25
Width	20.5
Height	40
Design	No
Protection class	IP 00
Thermal class	B, 130
Connection	10 cm lead
Solenoid weight	85 g
Armature weight	25 g
Product Line	Single Stroke Linear Solenoids

CONTACT

Sales Team Kendrion Malente

+49 (0) 4523 402-0

sales-ics@kendrion.com

PRODUCT

<https://www.kendrion.com/en/productfinder/group/product/linear-solenoids/h2486-r-f-24v-dc-100-ed>