


LINEAR SOLENOIDS

Linear Solenoid HU244

HU244-F-24V DC 100 ED

Open frame solenoid as **push type solenoid**. Our preferred types are available in small quantities from stock. Other versions (e.g. with integrated return spring) or other voltages are available on request. More information can be found in the download area.

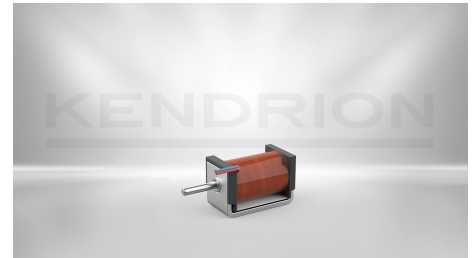

DESCRIPTION	VALUE
Duty cycle	100 %
Power consumption	2.9 W
Stroke	6 mm
Initial force	0.3 N
Nominal voltage	24 V
End force	0.7 N
Return spring	No
Dimensions (length, width, height)	16 x 17.5 x 24 mm
Length	16
Width	17.5
Height	24
Design	No
Protection class	IP 00
Thermal class	E, 120
Connection	10 cm lead
Solenoid weight	27 g
Armature weight	5 g
Product Line	Single Stroke Linear Solenoids

CONTACT

Sales Team Kendrion Malente

+49 (0) 4523 402-0

sales-ics@kendrion.com

PRODUCT

<https://www.kendrion.com/en/productfinder/group/product/linear-solenoids/hu244-f-24v-dc-100-ed>