


LINEAR SOLENOIDS

Linear Solenoid HU324

HU324-F-24V DC 100 ED

Open frame linear solenoid as a **Push type solenoid**. Our preferred types are available in small quantities from stock. Other versions (e.g. with integrated return spring) or other voltages are available on request. More information can be found in the download area.

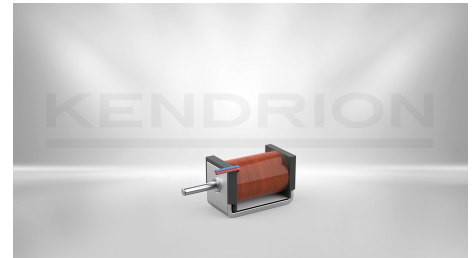

DESCRIPTION	VALUE
Duty cycle	100 %
Power consumption	4.2 W
Stroke	6 mm
Initial force	0.2 N
Nominal voltage	24 V
End force	2.4 N
Return spring	No
Dimensions (length, width, height)	18 x 21 x 32 mm
Length	18
Width	21
Height	32
Design	No
Protection class	IP 00
Thermal class	E, 120
Connection	10 cm lead
Solenoid weight	55 g
Armature weight	11 g
Product Line	Single Stroke Linear Solenoids

CONTACT

Sales Team Kendrion IAC

+49 (0) 4523 402-0

sales@kendrion.com

PRODUCT

<https://www.kendrion.com/en/productfinder/group/product/linear-solenoids/hu324-f-24v-dc-100-ed>