


LINEAR SOLENOIDS

Reversible Linear Solenoid LHR115

LHR1150001

Reversible Linear Solenoids of the LHR series are characterized by high performance. They are delivered with a horizontal characteristic curve. The armature is led on both sides with maintenance-free precision bearings coated with Teflon. This results in a very high resistance to wear, granting consistent solenoid performance throughout a long service life. The reversing solenoids are available in different versions.

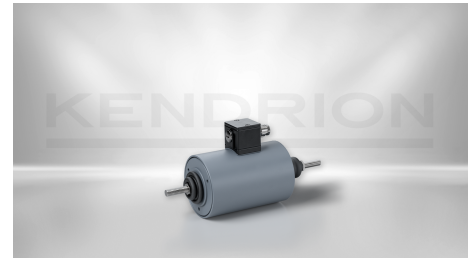

DESCRIPTION	VALUE
Duty cycle	100 %
Power consumption	50 W
Stroke	30 mm
Initial force	100 N
Nominal voltage	24 V
End force	450 N
Return spring	No
Dimensions (length, width, height)	185.4 x 115 x 115 mm
Length	185.4
Width	115
Height	115
Design	No
Protection class	IP 54
Thermal class	F 155
Connection	Plug
Solenoid weight	12000 g
Armature weight	1600 g

Product Line

Reversible Linear Solenoids

CONTACT

Sales Team Kendrion Malente

+49 (0) 4523 402-0

sales-ics@kendrion.com

PRODUCT

<https://www.kendrion.com/en/productfinder/group/product/linear-solenoids/lhr1150001>