



Elevator Line

Single-Acting Spreader Solenoids
Double-Acting Spreader Solenoids



WE MAGNETISE THE WORLD



Kendrion N.V. is one of the leading manufacturers of solenoids and electro-magnetic components worldwide.

Divided into the Industrial and Automotive division Kendrion guarantees a solution-oriented partnership with our customers. The company excels in innovative capability and maximum productivity.

Over the years Kendrion has integrated the brands Binder, Magnet AG, Neue Hahn Magnet, Thoma Magnettechnik, Linnig Antriebstechnik, Tri Tech LLC, Magneta and FAS Controls and Kuhnke.

Our business unit Industrial Magnetic Systems belongs to the division Industrial and develops, manufactures and distributes linear-, holding-, locking-, spreading-, control-, rotary- and vibrating solenoids as well as solenoid valves for industrial applications worldwide.

The strengths of Kendrion lies in the area of standard applications and in the area of developing customer-specific solutions.

With our technological know-how we ensure that your application will run smoothly.

All products are tested and developed according to DIN VDE 0580/ 07.2000. Kendrion Magnettechnik GmbH is a company certified according to ISO 9001:2008.

The main locations are in Donaueschingen (D) and Engelswies (D). Further locations are in Hausen am Albis (CH), Linz (A), Bradford (UK), Suzhou (CN), Mishawaka (USA) and Turin (I).

With our global distribution network we are available for our customers at any time and will be pleased to advise you.

Our products are used in almost all industrial areas, for example in the following industries:

- Machine building
- Safety engineering
- Transportation industry
- Medical engineering
- Power engineering
- Environmental technology
- Elevator industry
- Automation

Your industry is not listed? We are sure to have an optimum solution.

Wherever innovations and new approaches are required our staff will be happy to assist you.

Contact us. We're looking forward to assisting you!

Sales Hotline +49 (0) 771 8009 3770

Please find detailed performance data in our product catalogues, with the help of our experts or by our product finder on:

www.kendrion-ims.com





Product Line

Description

Elevator Line

Single-acting and double-acting spreader solenoids of the Kendrion Elevator Line with short strokes and high magnetic forces are particularly suitable for use in elevators and escalators as well as in industrial brakes for the release of block resp. drum brakes.

With these solenoids the stroke movement takes place from the stroke starting position to the stroke end position by electromagnetic force, while the armature reset is accomplished by external forces.

The products can be installed in any position and are maintenance-free if the force transfer is in axial direction.

By means of a sealing ring and a sealing plate the interior of the solenoid is largely protected against the penetration of dust and humidity.

The magnetic forces indicated are reached at 90% of the nominal voltage and in warmed up condition. The values for the switching cycles are valid for nominal voltage, warmed-up condition and load of 70% of the magnetic force of the device.

The products are manufactured and tested acc. DIN VDE 0580 / 07.2000.

Nominal voltage: 205 V DC

Note: Due to the change from mains voltage 220 V AC to 230 V AC and from selenium to silicon Graetz bridge rectifiers solenoids with a coil voltage designed for 180 V DC are thermally overloaded.

Switching frequency: 180/h

Duty cycle: 40% and 100%

If operated with overexcitation a respective overexcitation rectifier has to be selected (overexcitation factor 2:1 or 3.4:1). The AC mains voltage as well as the overexcitation and holding voltages are to be indicated with placement of the order. The standard duty cycle in these cases is 80%.

Protection class: acc. EN 60529 / 09.2000: IP 54

Thermal class: B, F



Design subject to change



Double-Acting Spreader Solenoid


Devices of the series LED088000A00 to LED165000A00 consist of two direct-acting solenoid systems accommodated in one housing. The devices are suitable for operation with normal excitation or overexcitation. Depending on the usage they are attached directly to the housing or loosely in the forks on both sides. The devices of this series are prepared for emergency hand release. A large selection of overexcitation rectifiers customized to the respective solenoid and usage is available. The main fields of application of the series 41 334 are elevators, escalators and passenger conveyors.

Type	Diameter x Length [mm]	Stroke [mm]	Duty cycle [%]	Magnetic force [N]	Input power [W]	Response time [ms]	Release time [ms]
LED088000A00	88 x 120	2	100	240 bis 500	28	depending on installation	depending on installation
LED088000A00	88 x 120	2	40	450 bis 650	68	depending on installation	depending on installation
LED098000A00	98 x 136	2,5	100	250 bis 620	32		
LED098000A00	98 x 136	2,5	40	650 bis 1080	90		
LED115000A00	115 x 140	3	100	450 bis 750	42		
LED115000A00	115 x 140	3	40	650 bis 980	98		
LED135000A00	135 x 165	3	100	600 bis 1500	55		
LED135000A00	135 x 165	3	40	1300 bis 2100	135		
LED140000A00	135 x 225	4	100	800 bis 1600	70		
LED140000A00	135 x 225	4	40	1600 bis 2200	175		
LED165000A00	165 x 250	4	100	1200 bis 2100	85		
LED165000A00	165 x 250	4	40	2100 bis 2600	225		

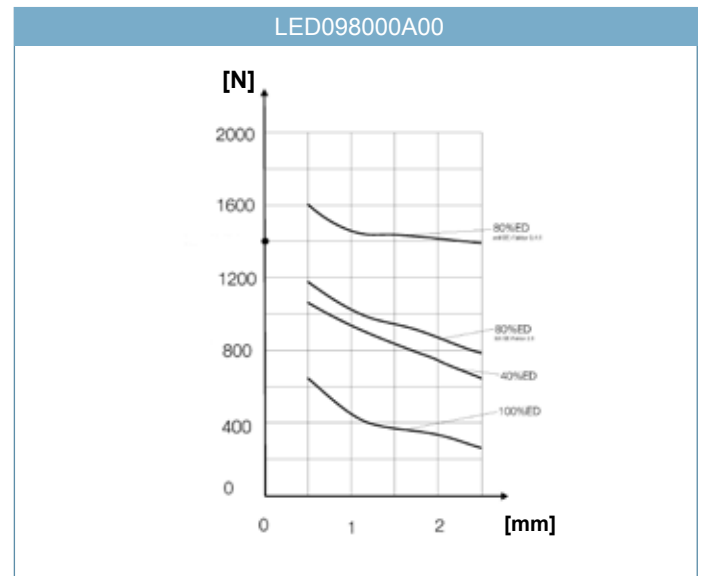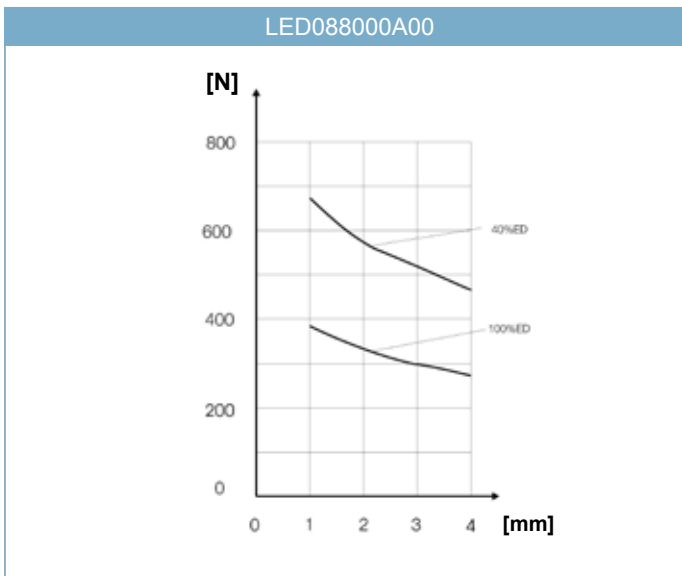


• maximum holding force possible

LED115000A00

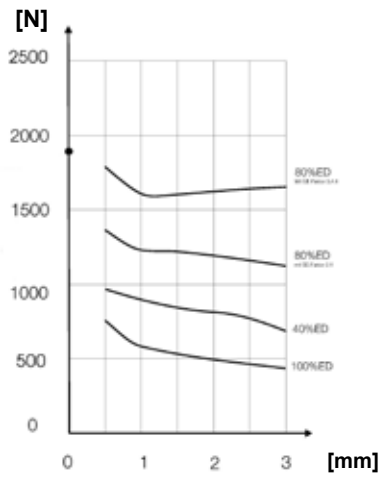


• maximum holding force possible

LED135000A00

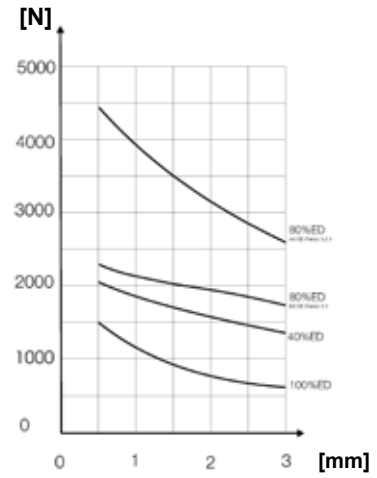


• maximum holding force possible

LED140000A00

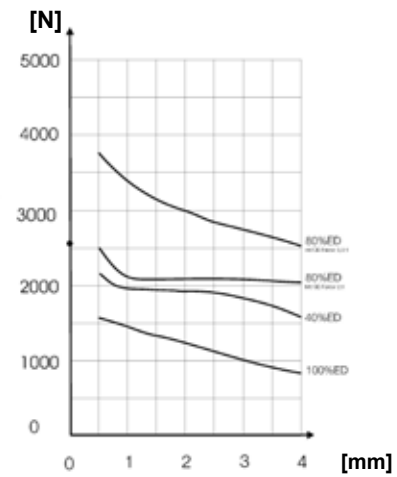

• maximum holding force possible

LED165000A00

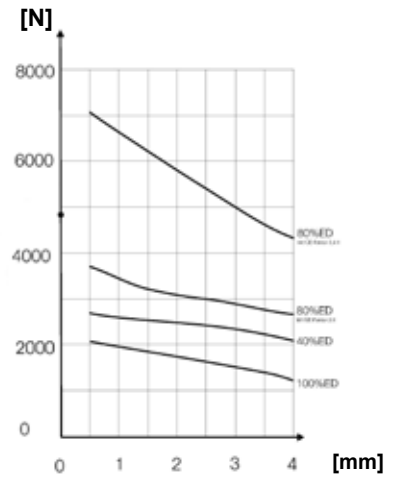


• maximum holding force possible




Single-Acting Spreader Solenoid

Devices of the series LES088000A00 to LES165000A00 are single-acting spreader solenoids for direct current with short strokes and high magnetic forces. The devices are suitable for operation with normal excitation or overexcitation. Depending on the usage they are attached directly to the housing or loosely in the forks on both sides. The main fields of application of these devices are elevators, the release of block brakes but also escalators.

Type	Diameter x Length [mm]	Stroke [mm]	Duty cycle [%]	Magnetic force [N]	Input power [W]	Response time [ms]	Release time [ms]
LES088000A00	88 x 89	4	100	220 bis 720	31	310	30
LES088000A00	88 x 89	4	40	330 bis 760	77	230	30
LES098000A00	98 x 100	5	100	280 bis 1085	47	360	35
LES098000A00	98 x 100	5	40	500 bis 1440	111	270	30
LES115000A00	115 x 106	6	100	350 bis 1440	53	500	40
LES115000A00	115 x 106	6	40	640 bis 1840	134	310	35
LES135000A00	135 x 125	6	100	600 bis 2080	64	730	50
LES135000A00	135 x 125	6	40	1070 bis 2810	151	460	45
LES140000A00	135 x 160	8	100	800 bis 2340	82	810	60
LES140000A00	135 x 160	8	40	1120 bis 2770	165	550	50
LES165000A00	165 x 176	8	100	1340 bis 3730	110	990	75
LES165000A00	165 x 176	8	40	1940 bis 4500	235	750	70

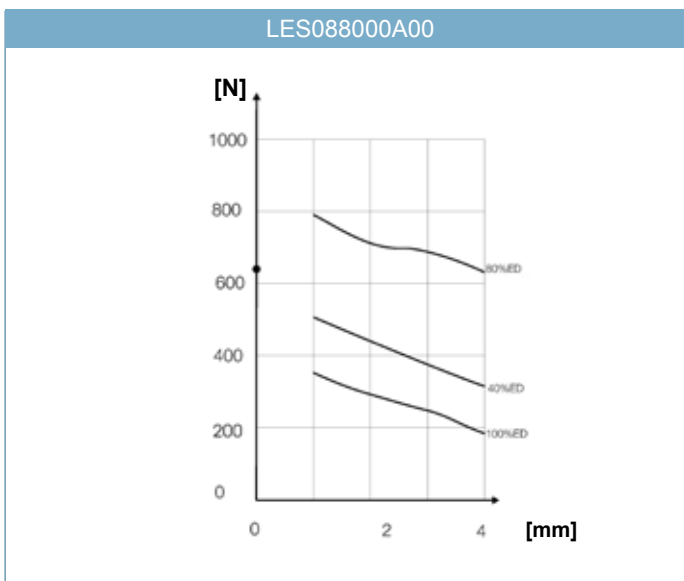


• maximum holding force possible

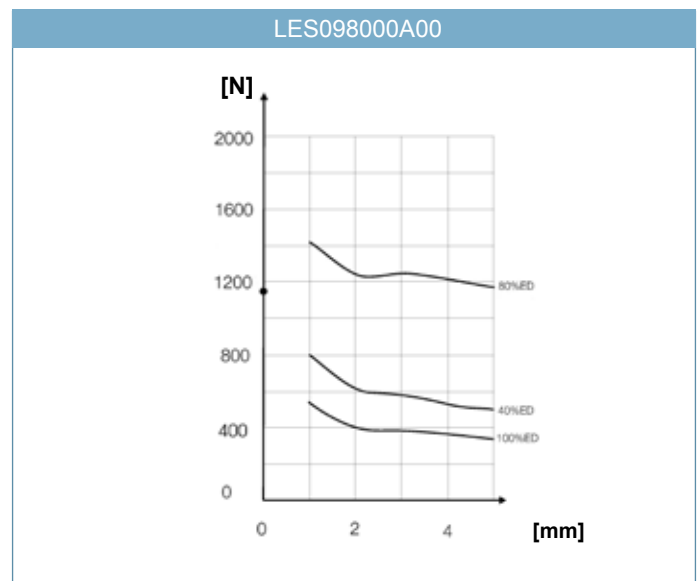


• maximum holding force possible

LES115000A00

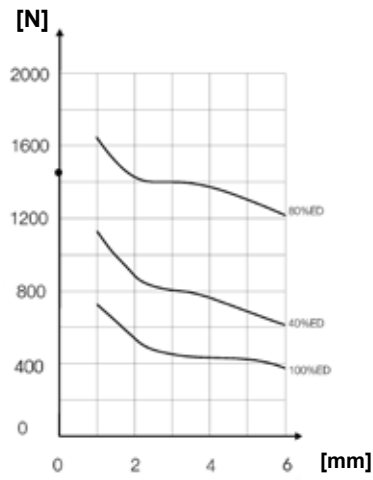


• maximum holding force possible

LES135000A00

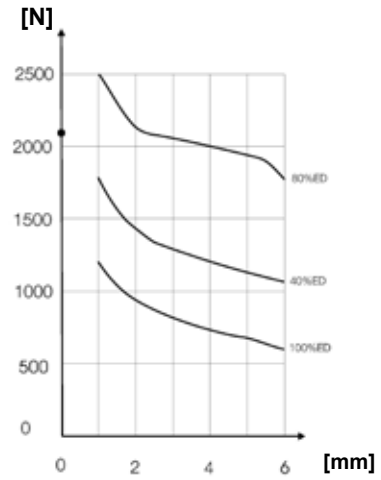


• maximum holding force possible

LES140000A00

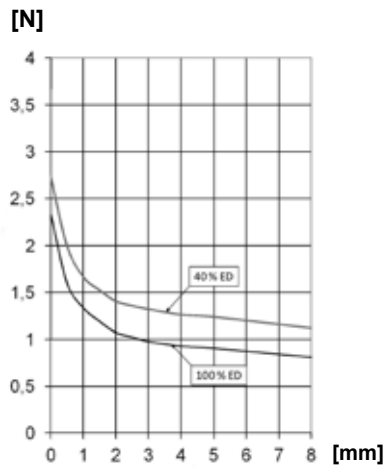

• maximum holding force possible

LES165000A00

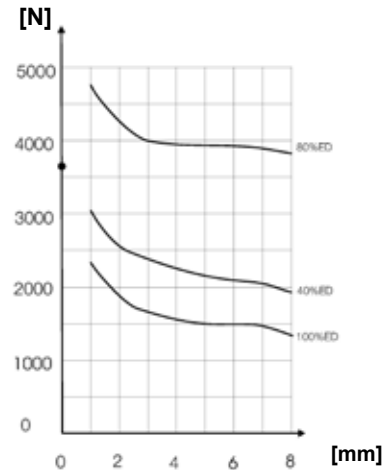

• maximum holding force possible



WE MAGNETISE THE WORLD

INDUSTRIAL MAGNETIC SYSTEMS

Locations

Germany : Headquarters

Kendrion (Donaueschingen/Engelswies) GmbH
August-Fischbach-Straße 1
78166 Donaueschingen
Phone: +49 771 8009 0
Fax: +49 771 8009 3634
sales-ims@kendrion.com
www.kendrion-ims.com

Germany : Headquarters

Kendrion (Donaueschingen/Engelswies) GmbH
Fred-Hahn-Straße 33
72514 Inzigkofen-Engelswies
Phone: +49 7575 208 0
Fax: +49 7575 208 3190
sales-ims@kendrion.com
www.kendrion-ims.com

Germany: Technical Office North-West

Mr. Wilhelm Martin
Bottroper Straße 15
46244 Bottrop-Kirchhellen
Phone: +49 2045 413434
Fax: +49 2045 406426
wilhelm.martin@kendrion.com
www.kendrion-ims.com

Germany: Technical Office North Rhine - Westphalia

VOR-Steuerungstechnik
Friedrich Rudolph GmbH
Schlaunstrasse 2
50309 Brühl
Phone: +49 2232 4179 131
Fax: +49 2232 4179 132
info@vor.de
www.vor.de

Germany: Technical Office East

BRAUNE Industrievertretung
Griebnitzstraße 4a
14482 Potsdam
Phone: +49 3554 8377 54
Fax: +49 3554 8377 55
mail@braune-industrievertretung.de
www.Braune-Industrievertretung.de

Germany: Technical Office Bavaria

Mr. Hans-Christian Pilder
Ablers 7
88175 Scheidegg
Phone: +49 8381 9487 61
Fax: +49 8381 9487 62
kendrion@pilder.de
www.kendrion-ims.com

Austria

Kendrion (Linz) GmbH
Estermannstraße 27
4020 Linz
Phone: +43 732 776 383
Fax: +43 732 783 558
office@kendrion-binder.at
www.kendrion-linz.com

China

Kendrion (Suzhou) Co. Ltd.
Factory Building No. 1
58 Yin Sheng Road
215126 Sheng Pu District
Suzhou Industrial Park
Phone: +86 512 8918 5002
Fax: +86 512 8918 5010
chn@kendrion.com
www.kendrion-suzhou.com

England

Kendrion (UK) Ltd.
Huddersfield Road, Low Moor
Bradford
West Yorkshire, BD 12 0TQ
Phone: +44 12 7460 1111
Fax: +44 12 7469 1093
uk@kendrion.com
www.kendrion-bradford.com

Italy: Technical Office

Mr. Vincenzo Leo
Via San Francesco d' Assisi 22
10121 Torino
Phone: +39 011 3997 752
Fax: +39 011 3997 700
vincenzo.leo@kendrion.com
www.kendrion-turin.com

Switzerland

Kendrion (Switzerland) AG
Albisstraße 26
8915 Hausen am Albis
Phone: 41 44 764 80 60
Fax: +41 44 764 80 69
ch@kendrion.com
www.kendrion-switzerland.com

USA

Kendrion (Mishawaka) LLC
56733 Magnetic Drive
Mishawaka, IN 46545-7481
Phone: +1 574 257 2422
Fax: +1 574 257 2421
info@kendrion-mishawaka.com
www.kendrion-mishawaka.com

For further contacts please refer to www.kendrion-ims.com